
TECHNICAL DATA SHEET
FT-V-78
2025-Jan-1
V6

CIVIL DUCT

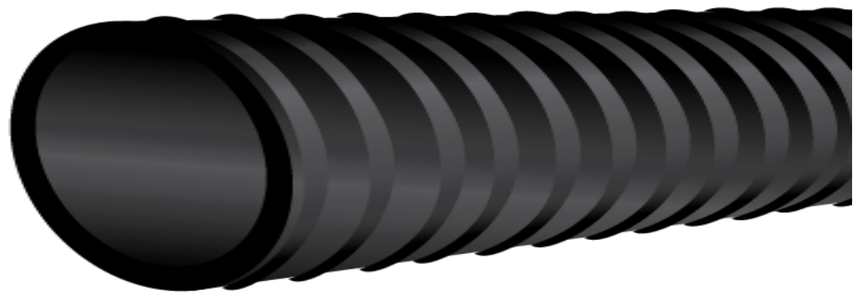

Product Line

INDUSTRIAL

Basic Function

Strand protection.

Applications

Designed for the protection of cables and strands in civil works-free areas.

Benefits

- Resistant to moisture and UV rays
- Flexible and lightweight for easy handling

TECHNICAL SPECIFICATIONS

REFERENCE	INNER DIAMETER			PACKAGING UNIT	PACKAGING UNIT	PACKAGING UNIT	PACKAGING UNIT
	Inches	mm	Tolerance ±3%				
DCC1500	1.1/2	38,1	37,0 a 39,2	30m			
DCC2000	2	50,8	49,3 a 52,3	30m			
DCC2130	2.1/8	54,0	52,4 a 55,6	30m			
DCC2500	2.1/2	63,5	61,6 a 65,4	30m			
DCC3000	3	76,2	73,9 a 78,5	30m			
DCC4000	4	101,6	98,6 a 104,6	30m			
DCC5000	5	127,0	123,2 a 130,8	30m			

PRODUCT SPECIFICATIONS

Material:	Polyolefin
Color:	Black
Construction:	Formed
Working Temperature:	-5°C to 50°C (23°F to 122°F)
Dimensional Tolerance:	±3%